

# Galaxy Edge+


Universal Mapper for any Application, with a Real-time Edge

## The Highest Resolution Airborne Lidar with Edge Computing

Galaxy Edge is the latest generation of the award-winning airborne lidar solution. Galaxy Edge delivers high-resolution data with the most efficient acquisition in steep terrain resulting in both lower carbon footprint and collection costs by 20-50%. Consistently delivering unmatched performance in variable terrain, compatible with fixed-wing, pressurized aircraft, drone or helicopter platforms. Real-time processing powered by Galaxy Onboard delivers lidar point clouds for immediate use upon landing.




### FEATURES & BENEFITS



#### PARALLEL SCAN LINES

Galaxy Edge now delivers straight and parallel scan lines

Uniform point spacing across the swath streamlines and cost-optimizes flight planning.



#### ADDITIONAL SCAN LINES

Galaxy Edge delivers more scanlines on the ground


Higher resolution of smaller objects like electric wires, poles, and street signs.



#### OPTIMIZED RESOLUTION

Galaxy Edge cuts atmospheric noise providing a clearer image


Reduces atmospheric noise and intensive labour delivering cleaner data, faster.



#### TURBULENCE & TERRAIN COMPENSATION

Galaxy Edge automatically compensates for airplane deviations and terrain changes

Reduces operational costs through ~50% reduction in flight lines and reflight.




#### REAL-TIME PROCESSING & QC

Galaxy Onboard processes and quality controls point cloud data instantaneously while in flight

Real-time QC allows issues to be actioned immediately in the air, reducing standby and rework costs.

Full-resolution point cloud available on landing, delivering rapid answers for time-sensitive applications and disaster response.



#### DIRECT FROM PLANE TO PRODUCTION




Galaxy Onboard delivers real-time point clouds with <10cm relative and <15cm absolute accuracy.

Bypasses processing and logistical delays and enables LAS data to be ingested directly into any production environment for classification, analysis, and same day delivery.

**GALAXY EDGE PRODUCTIVITY EXAMPLES  
(FLAT TERRAIN)**

Average Point Density	2 pts/m <sup>2</sup>	8 pts/m <sup>2</sup>	20 pts/m <sup>2</sup>	65 pts/m <sup>2</sup>
Flight Altitude (AGL) <sup>1,2</sup>	8858 ft 2700 m	6562 ft 2000 m	4790 ft 1460 m	1476 ft 450 m
Ground Speed	315 kn	210 kn	115 kn	115 kn
Swath Width <sup>3</sup>	3118 m	2309 m	1686 m	520 m
Instantaneous Coverage Rate <sup>4</sup>	1455 km <sup>2</sup> /hr	718 km <sup>2</sup> /hr	287 km <sup>2</sup> /hr	89 km <sup>2</sup> /hr
Ground Measurement Rate (kHz)	1,000,000 meas./sec	2,000,000 meas./sec	2,000,000 meas./sec	2,000,000 meas./sec

1. Calculated for 20% reflective targets; 99% detection probability; boost mode
2. Assumes full footprint interception
3. 60° FOV
4. 20% side lap considered

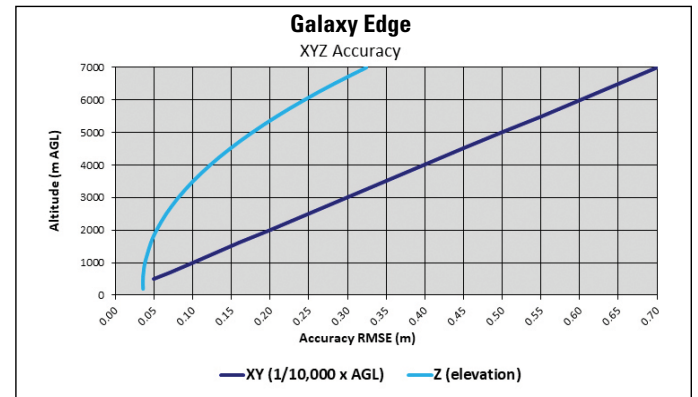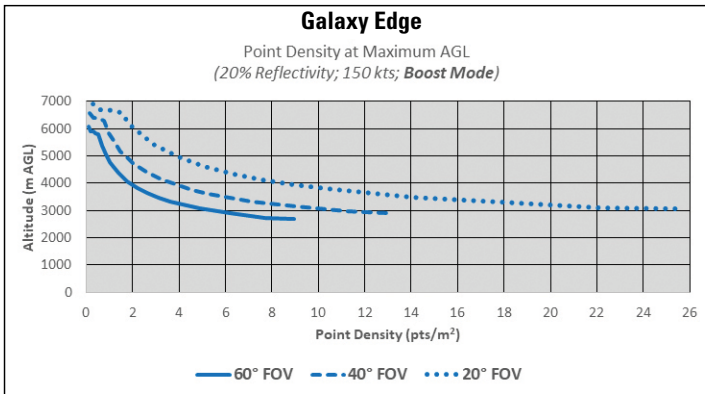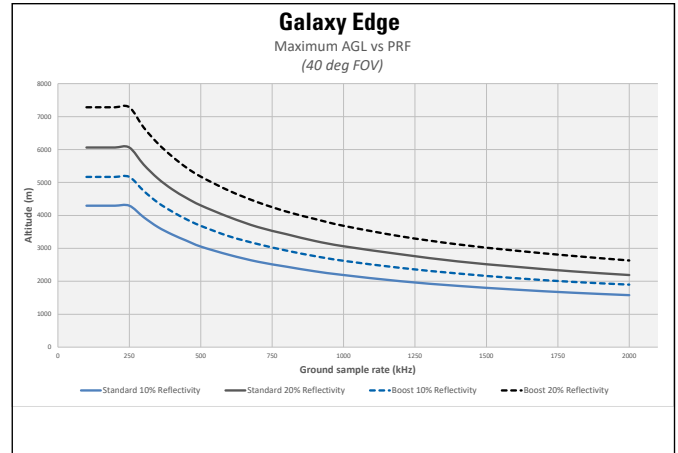

PARAMETER	SPECIFICATION
<b>Sensor Performance</b>	
Performance envelope <sup>1,2,3,4</sup>	150-6500 m AGL, nominal
Absolute horizontal accuracy <sup>2,3</sup>	1/10,000 × altitude; 1 σ
Absolute elevation accuracy <sup>2,3</sup>	< 0.03-0.25 m RMSE from 150-6500 m AGL
<b>Laser Configuration</b>	
Topographic laser	1064-nm near-infrared
Laser classification	Class IV (US FDA 21 CFR 1040.10 and 1040.11; IEC/EN 60825-1)
Pulse repetition frequency (effective)	Programmable, 100-2000 kHz
Beam divergence	0.16 mrad (1/e) or 0.23 mrad (1/e <sup>2</sup> )
Power Modes	20%, 40%, 70%, 100%
Laser range precision <sup>5</sup>	< 0.008 m, 1σ
Minimum target separation distance	< 0.7 m (discrete)
Range capture	Up to 8 range measurements, including last
Intensity capture	Up to 8 intensity measurements, including last (12-bit)
<b>Sensor Configuration</b>	
Position and orientation system	POS AV™ AP60 (OEM); 220-channel dual frequency GNSS receiver; GNSS airborne antenna with Iridium filters; high-accuracy AIMU (Type 57); non-ITAR
Scan angle (FOV)	10-60°
Swath width	10-115% of altitude AGL
Scan Pattern	Parallel scan lines
Scan frequency	Up to 180 Hz (360 scan lines/sec)
Scan Product *	Up to 3000
Flight management system	Optech FMS (Airborne Mission Manager and Nav) with operator console
SwathTRAK™	Dynamic FOV for fixed-width data swaths in variable terrain and correction for position and orientation deviations.
PulseTRAK™	Multipulse tracking algorithm with no density loss across PIA transition zones
Data storage	Removable SSD (primary); internal SSD (spare)
Power requirements	28 V; 400 W
Dimensions and weight	Sensor: 0.34 × 0.34 × 0.25 m, 27 kg — PDU: 0.42 × 0.33 × 0.10 m, 6.5 kg
Operating temperature	0 to +35°C
<b>Optional Peripherals</b>	
External data storage	Ruggedized, removable 2.5" SSD
Real-time Processing	Powered by Galaxy Onboard
Real-time Quality Control	Powered by Galaxy Onboard
Image capture	Compatible with 3rd party medium format cameras (PhaseOne, etc.)
Full waveform capture	16-bit digitization using Teledyne Intelligent Waveform Recorder (IWR-4)
Gyro-stabilization	SOMAG GSM4000 integration kit
Multi-sensor mounts and pods	Machined aluminum sensor mounts; single or dual Galaxy configurations + cameras Carbon-fiber sensor mounts supporting nadir and fore/aft oblique cameras. Heli-pod mount options for Bell 206/407 and AS350 (FAA-approved)

1. Target reflectivity ≥20%; 99% detection probability

2. Dependent on selected operational parameters; assumes nominal FOV of up to 40° in standard atmospheric conditions (i.e. 23-km visibility) and use of Optech LMS Professional software suite

3. Angle of incidence ≤20°

4. Target size ≥ laser footprint

5. Under Teledyne Optech test conditions, 1 sigma

\* Described as the ½ FOV x scan frequency.